

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 727 981 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

06.05.1999 Bulletin 1999/18

(21) Application number: 95900214.8

(22) Date of filing: 08.11.1994

(51) Int. Cl.⁶: **A61K 7/32**, A61K 7/00,
A45D 34/04

(86) International application number:
PCT/GB94/02447

(87) International publication number:
WO 95/13046 (18.05.1995 Gazette 1995/21)

(54) ANTIPERSPIRANTS AND METHOD OF APPLYING ANTIPERSPIRANT USING A SHAPED ARTICLE

SCHWEISSHEMMENDE MITTELN UND VERFAHREN ZU SEINER APPLIKATION SOWIE
VORRICHTUNG DAZU

ANTSUDORAL ET SON PROCEDE D'APPLICATION AU MOYEN D'UN ARTICLE FA ONNE

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI NL PT SE

(30) Priority: 08.11.1993 GB 9322962

(43) Date of publication of application:
28.08.1996 Bulletin 1996/35

(73) Proprietor: THE GILLETTE COMPANY
Boston, Massachusetts 02199 (US)

(72) Inventors:
• CAUSTON, Brian Edward,
10 Church Road
Aldermaston
Berkshire RG7 4LT (GB)

• BAINES, Frederick Charles,
14 Yew Tree Close
Bedfordshire LU6 2ED (GB)

(74) Representative:
Baillie, Iain Cameron et al
Ladas & Parry,
Dachauerstrasse 37
80335 München (DE)

(56) References cited:
EP-A- 0 154 465 EP-A- 0 164 644
EP-A- 0 363 137 WO-A-89/09066
FR-A- 2 302 752 US-A- 3 317 394
US-A- 3 682 848 US-A- 4 723 860

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 727 981 B1

Description

[0001] This invention relates to antiperspirants and, more particularly, to a new antiperspirant product.

[0002] Antiperspirants are sold in three formulations, namely as aerosols (aluminium chlorhydroxide complex (ACH)), and in the zirconium form as roll-ons and wax-like sticks. Mixing the active antiperspirant with other substances in these formulations, particularly in roll-ons and sticks, can cause a significant reduction in the efficacy of the product in reducing the production of perspiration. Whilst aerosols do not suffer so much from this problem, there is currently a move away from aerosol type formulations for environmental reasons.

[0003] We have now devised a new antiperspirant product which is not an aerosol and which does not necessitate the use of materials which significantly reduce the efficacy of the antiperspirant material therein.

[0004] US-A-3 682 848 discloses water-insoluble resinous microporous products which may comprise deodorants. The disclosed porous structure is resilient so that the substance comprised therein may be expressed.

[0005] According to the present invention there is provided an antiperspirant product which comprises a dry water-insoluble, porous, preferably cross-linked polymeric matrix having a solid, particulate antiperspirant homogeneously distributed therein in interconnecting pores thereof, the product being in the form of a hard shape having a porous structure which is substantially rigid, the pore geometry of said porous structure being stable against water-leaching of said antiperspirant from said pores.

[0006] Also provided according to the invention is a shaped article made of said product according to the present invention, is well as a method of applying antiperspirant to a surface which comprises wetting said shaped article of the invention and contacting the wet article with said surface.

[0007] Further provided according to the invention is the use of a dry water-insoluble, porous, hard, preferably cross-linked polymeric matrix having a solid, particulate antiperspirant homogeneously distributed therein in interconnecting pores thereof, as a store and source of antiperspirant, by application of water thereto to leach antiperspirant therefrom without change in the pore geometry.

[0008] There is also provided according to the invention a method of making said antiperspirant product of the invention, which comprises forming a mixture of a solid, particulate antiperspirant and matrix-forming materials; and polymerizing and/or cross-linking the matrix-forming materials to form a dry water-insoluble, porous, cross-linked polymeric matrix with the antiperspirant homogeneously distributed therein in interconnecting pores thereof.

[0009] In an embodiment of the invention, the antiperspirant product comprises a water-insoluble, porous, cross-linked polymeric matrix having an antiperspirant homogeneously distributed therein in interconnecting pores thereof, the product being in the form of a hard shape from which the antiperspirant can be released by water leaching with zero order release without change in the pore geometry.

[0010] The polymeric matrix is water-insoluble and serves to hold the antiperspirant therein until it is required. There are a lot of suitable materials from which the matrix may be made, for example polyurethanes, epoxy resins, polyolefins, polystyrene, polyvinyl chloride, phenol formaldehydes, silicones, poly(meth)acrylates, polyamides and poly(meth)acrylamides. We prefer to use cross-linked polymers made from ethylenically unsaturated monomers, for example cross-linked polyacrylates or polymethacrylates, such as poly(bisphenol A) propyl dimethacrylate, ethylene glycol dimethacrylate, triethylene glycol dimethacrylate or tetraethylene glycol dimethacrylate.

[0011] The product is made by mixing the matrix-forming materials with the antiperspirant, and then polymerising and/or cross-linking.

[0012] The antiperspirant is substantially homogeneously distributed throughout the matrix. The relative amounts of ACH and matrix-forming materials can vary widely. For example, on a weight basis, the product can comprise up to about 99% ACH, or up to about 95% matrix-forming material. More usually, the amount of ACH is from 30 to 80%, most preferably from 60 to 70%. The amount of polymeric matrix is usually from 20 to 60%, most preferably from about 20 to 35%.

[0013] The antiperspirant must be phase-separated from the matrix-forming materials so that it forms the pores in the final matrix. Normally, solid antiperspirant is used but liquid solutions can be employed. When an aqueous solution is used, it will dry out to leave a solid within, for example, 24 hours.

[0014] The precise nature of the active antiperspirant used in the products of this invention is not critical. Any material with antiperspirant properties can be used including, of course, those presently in common use in the art. Since it is not necessary in the present invention to use any significant amount of other materials, the efficacy of the antiperspirant as applied to the skin can be comparable with fresh "hot room" solutions, i.e. up to 80% sweat reduction or more can be achieved compared with the 50% or less associated with currently marketed forms of antiperspirant.

[0015] We have found that in use of the products of the invention, the active antiperspirant displays bactericidal properties.

[0016] The product can be made in any desired shape. A simple stick or other shape can be provided, for use with or without a holder. However, other shapes are equally possible. In one preferred arrangement, the shaped product is associated with a unit therefor, which unit includes a water reservoir for wetting the shape immediately prior to use.

[0017] The products of the invention can include other materials in addition to the antiperspirant as desired. Such additives include, for example, oral deodorants such as cetyl pyridinium chloride, and cosmetically efficacious materials such as moisturisers, eg. propylene glycol or glycerine; foaming agents, eg. fatty alcohol sulphates, alkyl benzene sulphonates, betaines or sulposuccinates; antihistamines, eg. embramine or phenylloxamine; antiinflammatory compounds, eg. aloe vera or allantoin; lubricants such as polyethylene oxides, perfumes and fragrances, and substances such as menthol to give a soothing cooling sensation. These additives are water leachable from the product together with the antiperspirant. The products of the invention can contain large quantities of these materials, eg. up to 95% by weight, but normally they are present in minor amount, eg. up to 25%, and most usually in amounts of up to about 5% each.

[0018] When one or more of these additives is present in addition to the antiperspirant, the product of the invention is made as above described, i.e. by mixing the matrix-forming monomers with the antiperspirant and additive and then polymerising. The antiperspirant and any additive need to be in a discreet phase from the matrix-forming materials so as to form the pore structure in the final matrix and to be leachable therefrom. Sometimes it may be desired to incorporate an additive material which tends to dissolve in the matrix-forming materials and act, for example, as a plasticiser.

According to a further aspect of the present invention, this problem can be overcome by lowering the temperature of the mixture to a level at which the additive becomes insoluble and forms a discreet dispersed phase. One example of such an additive is menthol which can dissolve in certain acrylic resins. By lowering the temperature, eg. to below 0°C and lower, the menthol is insolubilised. The resin can then be cured at the low temperature, for example using blue light. Another example is polyethylene oxide. This technique of low temperature curing is, of course, also useful where heat-sensitive additives are involved.

[0019] In the products of the invention, the porous structure is essentially rigid so that, as the water-soluble antiperspirant (and any additive) is leached out, the pore geometry does not change. There is not usually any advantage in having a very hard brittle matrix, and indeed this can be disadvantageous. In order to give a softer feel, we prefer to have a water-insoluble plasticiser in the polymer. The choice of plasticiser will depend on the polymeric matrix, as will be clear to those skilled in the art, but for acrylic resins we prefer to use tetrahydrofuran (THF) methacrylate and/or C₁₂ methacrylate for this purpose. (By C₁₂ methacrylate, we mean methacrylate with a C₁₂ alkyl chain, the C₁₂ being an average chain length for the substituents.) The amount by weight of THF methacrylate is up to about 95%, preferably up to about 10%, most preferably around 5%. The amount by weight of C₁₂ methacrylate is up to about 90%, preferably up to about 15%, most preferably around 7%.

[0020] In the products of the invention, the antiperspirant (and any additive) is held within the matrix until it is to be used. Then the product is wet with water and applied to the user's skin. The water leaches the antiperspirant (and any additives) out of the matrix. The life of the product will depend on the degree to which it is used and on the original loading of antiperspirant in the matrix. However, regular daily use of a stick as an antiperspirant can provide at least two week's effective protection. The formulation should of course be stored dry between uses.

[0021] The antiperspirant (and any additive) is held in pores in the matrix structure. As is well known in the polymer art, the size and interconnecting of pores in such matrices can be closely controlled. For the purposes of the present invention, the pore properties should be such as to provide suitable water-leachability of the antiperspirant until the matrix is substantially exhausted. The pore size can vary widely, but will normally be in the range from 2 microns up to 2mm. It is determined by the size of the ACH (and other actives), and this sizing can be controlled by ball milling, for example. A particle size of 10 to 25 microns, eg. about 15 microns, for the ACH is often used, but other sizes can be accommodated.

[0022] It is a feature of the invention that the release of antiperspirant (and any additive) is a zero order release, i.e. there is a substantially constant release rate independent of the amount of antiperspirant remaining in the product (until near to depletion). This is due to the fact that, as the antiperspirant is removed, the pore geometry is substantially unaffected.

[0023] In the course of use, the surface of the matrix may be or become roughened due to its porous nature. For user comfort, a lubricant such as a polyoxyethylene polymer may be included in the matrix. Alternatively, the surface of the product can be especially smoothed or polished in those areas designed to contact the user's skin.

[0024] In order to provide some signal of impending exhaustion of antiperspirant from the formulation, an indicator can be provided. For example, a water-soluble coloured material can be located at or near the centre of the matrix so that, as the last amounts of antiperspirant are leached out, the indicator begins to appear at the surface.

[0025] A particularly important feature of the present invention is that the new product of antiperspirant requires little or no packaging. The dry shape can be handled without any wrapping at all: alternatively a single plastics film covering is all that is necessary. The fact that the product can be provided in any desired shape provides wide possibilities for marketing.

[0026] In order that the invention may be more fully understood, reference will hereafter be made to the accompanying drawings, in which:

Fig.1 is a graph of ACH release against time for a product of the invention as described in Example 2;

Fig.2 is a side elevation of a first embodiment of article of the invention;

Fig.3 is a front elevation of the article of Fig.2; and

Fig.4 is a schematic plan view of a second embodiment of article in association with a water reservoir.

Figs. 5 to 10 are dissolution curves of ACH and other materials from products of the invention made in Examples 3,4,5,7 and 8; and

Figs. 11 to 15 are scanning electron microscope views of products of the invention.

[0027] In order that the invention may be more fully understood, the following Examples are given by way of illustration only.

Example 1

Aluminium chlorhydrol (2g) was mixed with a solution (0.5g) of Hitad (acrylic resin), camphorquinone and dibutyl tin dilaurate to form a smooth paste. (Hitad is an aromatic diacrylate diluted with a dimethylacrylate.) The paste was pressed under a force of 1 ton into a circular tablet which was cured on each side for 10 minutes with blue light (247nm) at room temperature. The constitution of the tablet was:

	%
Hitad (London Resin Co. Ltd.)	19.6
Camphorquinone	0.2
Dibutyl tin dilaurate	0.2
Aluminium chlorhydrol	80.0

[0028] Upon wetting with water, the aluminium chlorhydrol was leachable from the tablet. The tablet structure itself remained intact and the aluminium chlorhydrol was released until the supply was exhausted.

Example 2

A homogeneous solution was made by mixing together at room temperature:

	Wt. parts
Hitad acrylic resin (London Resin Co. Ltd)	90
THF methacrylate	5
C ₁₂ methacrylate	10
Camphorquinone	1
Dibutyl tin dilaurate	1

[0029] Aluminium chlorohydrate (ACH) was also included in amounts varying from 5 to 50% by weight of the total mixture.

[0030] The mixtures were cured into flat blocks 12mm x 16mm x 2.5mm using light of wavelength 247nm. Cure times of 15 minutes were used. The cured blocks were then tested for the rate of release of the ACH. The blocks were each placed in a stainless steel infuser in 250ml stirred water at 25°C. The ACH release was measured using a chloride electrode, and the results for the block containing 50% by weight ACH are shown in Figure 1. It can be seen that release of ACH from the blocks was linear with time. The other blocks containing (initially) different amounts of ACH gave similar results.

[0031] A block made in the same way but containing 50% ACH and 5% polyethylene oxide (PEO) had improved lubricity over a block without the PEO. The PEO was of molecular weight 5,000,000.

Example 3

ACH was mixed with the A and B parts of Rhone-Poulenc's Rhodorsil Silicone RTV-2 in the proportions given below. The mixture was poured into a mould 4 x 11 x 16mm and allowed to cure at 20°C for 24 hours. When placed in water at 28°C, the dissolution curve shown in Figure 5 was obtained.

Material A	3.0g
Material B	0.3g
ACH	3.3g

As can be seen from Fig. 5, the ACH which is distributed throughout the silicone matrix, leaches out with essentially zero order release.

Example 4

A paste of ACH and styrene, to which had been added divinyl benzene (crosslinking agent), camphorquinone (light-activated initiator) and dibutyl tin dilaurate (initiator), was made as follows:

Styrene	2.0g
Divinyl benzene	0.3g
Camphorquinone	0.5g
Dibutyl tin dilaurate	0.5g
ACH	2.3g

The paste was packed into a mould 4 x 11 x 16mm and cured by shining light of wavelength 247nm on to the paste for 10 minutes.

[0032] The hard cured moulded shape was immersed in water and the concentration of ACH leaching therefrom into water at 28°C was measured against time to provide the dissolution curve shown in Fig. 6. As can be seen, the ACH leaches out with essentially zero order release.

Example 5

The following epoxy resin premix A was mixed 50:50 (by weight) with ACH and the mixture packed into a mould 4 x 11 x 16mm and cured for 18 hrs. at 60°C.

Epoxy premix A:	
Dodecyl succinic anhydride	1.25g
Diglycidyl ether of bisphenol A	1.125g
Benzyl dimethylamine	0.125g

Mixture:	
Epoxy premix A	2.5g
ACH	2.5g

The moulded shape was immersed in water at 28°C and the release of ACH therefrom was monitored over a period of time and plotted (Fig. 7). As can be seen, the ACH is leached from the shape with essentially zero order release.

[0033] After leaching out the ACH, the residual matrix was fractured. An SEM was obtained and is shown in Fig. 13. As can be seen, the pores are empty.

Example 6

Repetition of Example 4 using a polyamide or a poly(meth)acrylamide in place of the styrene gives similar results.

Example 7

A paste of the following composition was prepared:

Hitad (acrylic resin)	50g
THF methacrylate	5g
C ₁₂ methacrylate	10g
ACH	50g
Polyethylene oxide (PEO)	5g
Camphorquinone	0.5g
Dibutyl tin dilaurate	0.5g

The paste was filled into a mould and cured with light of wavelength 247nm for 15 minutes.

[0034] The hard cured shape was then immersed in water at 28°C and the amounts of ACH and PEO leached therefrom were recorded against time. Both the ACH and the PEO were released linearly with time. Fig. 8 shows a plot of the release of the ACH (measured by chloride ion). Fig. 9 shows a plot of the release of PEO as measured by refractive index.

[0035] The experiment was repeated but without any PEO present in the paste. As can be seen from Fig. 8, the release rate for the ACH was enhanced by the incorporation of the PEO.

Example 8

A paste of the following composition was prepared:

Hitad (acrylic resin)	50g
THF methacrylate	5g
C ₁₂ methacrylate	10g
ACH	50g
Cetyl pyridinium chloride (CPC)	5g

(continued)

Camphorquinone	0.5g
Dibutyl tin dilaurate	0.5g

The paste was placed in a mould and cured with light of wavelength 247nm for 15 minutes.

[0036] The hard solid shape removed from the mould was immersed in water at 28°C and the release rates of the CPC and the chloride ion were monitored. Both were linear as is shown by Fig. 10. The chloride ion comes from both the ACH and the CPC. Using refractive index, we have also established that the release of ACH is linear.

Example 9

The following mixture was prepared:

Hitad (acrylic resin)	50g
PEG 1500	50g
ACH	50g
THF methacrylate	5g
C ₁₂ methacrylate	10g
Camphorquinone	0.5g
Dibutyl tin dilaurate	0.5g

PEG 1500 is a liquid, and the above liquid mixture was cooled with stirring to 4°C. At this temperature, the PEG phase is separate from the resin, so that the PEG forms the interconnected pores. A portion of the mixture was light cured in a mould at 4°C.

[0037] The shaped block produced was immersed in water, and the ACH and PEG were released into the water. After leaching out the ACH and PEG, the block was examined by scanning electron microscope and was found to contain a continuous fine pore structure (see Fig. 11).

Example 10

A cured block containing 38.5% ACH was made by the procedure of Example 2. The block was immersed in water for two weeks and then fractured. The internal structure was examined by scanning electron microscope and the result is shown in Fig. 12. It can be seen that the ACH has been extracted from the centre of the block.

Example 11

A mixture of ACH and PEO in polyethylene was injection moulded to produce a shaped article of the invention. The release of ACH and PEO therefrom was linear. Similar results were obtained by injection moulding a mixture of ACH and PEO in PVC.

Example 12

The following mixture was prepared:

Hitad (acrylic resin)	50g
Polyethylene oxide (PEO)	50g
Menthol	1g

(continued)

ACH	50g
THF methacrylate	5g
C ₁₂ methacrylate	10g
Camphorquinone	0.5g
Dibutyl tin dilaurate	0.5g

To keep the menthol and PEO in a phase separated from the resin, the mixture was cooled with stirring to 10°C. A portion of the mixture was light cured in a mould at 10°C.

[0038] The shaped block produced was rubbed on the skin and the release of menthol was evident.

[0039] Figures 14 and 15 are scanning electron photomicrographs of the inner regions products of the invention after the ACH has been leached therefrom and the matrix fractured. These show the interconnecting pore structure, the pores being empty. The product of Fig. 14 was 50% ACH in Hitad resin with no plasticiser (eg. Example 1) and the product of Fig. 15 was 50% ACH in Hitad with plasticiser (eg. Example 2).

[0040] Referring to Figures 2 and 3 of the drawings, the embodiment shown is ovoid in shape. It consists of a solid block of antiperspirant product of the invention, i.e. a water-insoluble matrix with antiperspirant distributed therein.

These ovoid shapes can be made in any desired size, but will usually have a major dimension of about 3 or 4 inches and a minor dimension of about 2 inches.

[0041] In Fig. 4, the shaped article is in the form of a roller 1 rotatably mounted between arms 2 on support 3. The support is attached to a container 4, for example a bottle, which serves as a water (5) reservoir. A wick 6 extends from inside bottle 4, through an aperture in support 3, to contact the periphery of roller 1.

[0042] The roller 1 is made of an antiperspirant product of the invention and comprises a water-insoluble polymeric matrix having an antiperspirant distributed therein.

[0043] In use, the roller is moved over (and in contact with) an area of skin to which antiperspirant is to be applied. As the roller 1 rotates, it is wet by water from wick 6, and the water leaches antiperspirant from roller 1 and carries it onto the skin.

Claims

1. An antiperspirant product which comprises a dry water-insoluble, porous, preferably cross-linked polymeric matrix having a solid, particulate antiperspirant homogeneously distributed therein in interconnecting pores thereof, the product being in the form of a hard shape having a porous structure which is substantially rigid, the pore geometry of said porous structure being stable against water-leaching of said antiperspirant from said pores.
2. A product according to claim 1, wherein the polymeric matrix is an acrylate or methacrylate resin, an epoxy resin, polystyrene, polyurethane, polyolefin, polyamide or silicone.
3. A product according to claim 2, wherein the matrix is an acrylate or methacrylate resin and contains THF methacrylate and/or C₁₂ methacrylate as plasticiser.
4. A product according to claim 1, 2 or 3, which also contains one or more additives distributed in the matrix and leachable therefrom with water.
5. A product according to claim 4, wherein the one or more additives are selected from oral deodorants, moisturisers, foaming agents, antihistamines, antiinflammatory compounds, lubricants, perfumes and fragrances.
6. A product according to any preceding claim, which also contains an indicator which becomes visible upon depletion of the antiperspirant from the matrix.
7. A shaped article made of a product as claimed in any of claims 1 to 6.
8. An article according to claim 7, which is mounted in a holder therefor.
9. An article according to claim 7 or 8, in association with a unit therefor which unit includes a water reservoir for wetting the article immediately prior to use.

10. A method of applying antiperspirant to a surface, which comprises wetting a shaped article as claimed in claims 7, 8 or 9, and contacting the wet article with the said surface.
- 5 11. The use of a dry water-insoluble, porous, hard, preferably cross-linked polymeric matrix having a solid, particulate antiperspirant homogeneously distributed therein in interconnecting pores thereof, as a store and source of antiperspirant, by application of water thereto to leach antiperspirant therefrom without change in the pore geometry.
12. A method of making an antiperspirant product as claimed in any of claims 1 to 6, which comprises forming a mixture of a solid, particulate antiperspirant and matrix-forming materials; and polymerising and/or cross-linking the matrix-forming materials to form a dry water-insoluble, porous, cross-linked polymeric matrix with the antiperspirant homogeneously distributed therein in interconnecting pores thereof.
- 10 13. A method according to claim 12, wherein the mixture also contains one or more additives which become distributed in the pores of the matrix with the antiperspirant.
- 15 14. A method according to claim 13, wherein an additive is present which is capable of dissolving in the matrix-forming materials, and wherein the mixture is cooled

Patentansprüche

- 20 1. Schweißhemmendes Produkt, umfassend eine trockene, wasserunlösliche, poröse, vorzugsweise vernetzte polymere Matrix, in der ein festes, disperses schweißhemmendes Mittel in miteinander verbundenen Poren homogen verteilt ist, wobei das Produkt in einer harten Form ausgebildet ist mit einer porösen Struktur, die im wesentlichen starr ist, wobei die Porengeometrie der porösen Struktur beständig ist gegen ein durch Wasser verursachtes Auslaugen des schweißhemmenden Mittels aus den Poren.
- 25 2. Produkt nach Anspruch 1, bei dem die polymere Matrix ein Acrylat- oder Methacrylatharz, ein Epoxidharz, Polystyrol, Polyurethan, Polyolefin, Polyamid oder Silicon ist.
- 30 3. Produkt nach Anspruch 2, bei dem die Matrix ein Acrylat- oder Methacrylatharz ist und THF-Methacrylat und/oder C₁₂-Methacrylat als Weichmacher enthält.
4. Produkt nach Anspruch 1, 2 oder 3, das außerdem einen oder mehrere Zusätze enthält, die in der Matrix verteilt sind und mit Wasser aus dieser herausgewaschen werden können.
- 35 5. Produkt nach Anspruch 4, bei dem der eine bzw. die mehreren Zusätze ausgewählt sind aus Munddesodoranzien, Feuchthaltemitteln, Schaumbildnern, Antihistaminen, entzündungshemmenden Verbindungen, Gleitmitteln, Parfums und Duftstoffen.
- 40 6. Produkt nach einem der vorhergehenden Ansprüche, das außerdem einen Indikator enthält, der sichtbar wird, wenn kein schweißhemmendes Mittel mehr auf der Matrix vorhanden ist.
7. Geformter Gegenstand aus einem Produkt nach einem der Ansprüche 1 bis 6.
- 45 8. Gegenstand nach Anspruch 7, der in einer Halterung dafür befestigt ist.
9. Gegenstand nach Anspruch 7 oder 8, in Verbindung mit einer Einheit dafür, die einen Wasserbehälter zum Benetzen des Gegenstandes unmittelbar vor Gebrauch umfaßt.
- 50 10. Verfahren zum Aufbringen eines schweißhemmenden Mittels auf eine Oberfläche, bei dem ein geformter Gegenstand nach Anspruch 7, 8 oder 9 benetzt wird, und der nasse Gegenstand mit der Oberfläche in Kontakt gebracht wird.
- 55 11. Verwendung einer trockenen wasserunlöslichen, porösen, harten, vorzugsweise vernetzten polymeren Matrix, in der ein festes, disperses schweißhemmendes Mittel in miteinander verbundenen Poren, die als Speicher und Quelle für das schweißhemmende Mittel dienen, homogen verteilt ist, durch Aufbringen von Wasser auf die Matrix, um schweißhemmendes Mittel aus dieser auszuwaschen, ohne daß sich die Porengeometrie dabei verändert.

12. Verfahren zur Herstellung eines schweißhemmenden Produktes nach einem der Ansprüche 1 bis 6, bei dem eine Mischung aus einem festen, dispersen schweißhemmenden Mittel und aus matrixbildenden Stoffen hergestellt wird; und bei dem die matrixbildenden Stoffe polymerisiert und/oder vernetzt werden, um eine trockene wasserunlösliche, poröse, vernetzte polymere Matrix zu bilden, in der das schweißhemmende Mittel in miteinander verbundenen Poren homogen verteilt ist.

13. Verfahren nach Anspruch 12, bei dem die Mischung außerdem einen oder mehrere Zusätze enthält, die in den Poren der Matrix mit dem schweißhemmenden Mittel verteilt werden.

14. Verfahren nach Anspruch 13, bei dem ein Zusatz vorhanden ist, der sich in den matrixbildenden Stoffen lösen kann, und bei dem die Mischung abgekühlt wird.

Revendications

1. Produit antisudoral, qui comprend une matrice polymère sèche poreuse, insoluble dans l'eau, de préférence réticulée, comportant une substance antisudorale particulière solide répartie d'une manière homogène dans la matrice dans ses pores reliés entre eux, le produit étant sous la forme d'un objet façonné dur ayant une structure poreuse, qui est fortement rigide, la géométrie des pores de ladite structure poreuse étant stable vis à vis de l'élimination par lessivage avec de l'eau de ladite substance antisudorale desdits pores.

2. Produit selon la revendication 1, dans lequel la matrice polymère est une résine d'acrylate ou de méthacrylate, une résine époxy, un polystyrène, un polyuréthane, une polyoléfine, un polyamide ou un silicone.

3. Produit selon la revendication 2, dans lequel la matrice est une résine d'acrylate ou de méthacrylate et elle contient un méthacrylate de THF et/ou un méthacrylate en C₁₂, en tant que plastifiant.

4. Produit selon la revendication 1, 2 ou 3, qui contient également un ou plusieurs additifs répartis dans la matrice et éliminables par lessivage avec de l'eau.

5. Produit selon la revendication 4, dans lequel l'additif ou les additifs sont choisis parmi les déodorants oraux, les humidifiants, les agents moussants, les antihistaminiques, les composés anti-inflammatoires, les lubrifiants, les parfums et les arômes.

6. Produit selon l'une quelconque des revendications précédentes, qui contient également un indicateur qui devient visible lors de la disparition de la substance antisudorale de la matrice.

7. Objet façonné fabriqué en un produit tel que revendiqué dans l'une quelconque des revendications 1 à 6.

8. Objet façonné selon la revendication 7, qui est prévu dans un support à cet effet.

9. Objet selon la revendication 7 ou 8, en combinaison avec un dispositif à cet effet, ledit dispositif comprenant un réservoir d'eau pour humidifier l'objet immédiatement avant son utilisation.

10. Procédé pour appliquer une substance antisudorale sur une surface, qui comprend l'humidification d'un objet façonné tel que revendiqué dans les revendications 7, 8 ou 9, et la mise en contact de l'objet humidifié avec ladite surface.

11. Utilisation de la matrice polymère sèche, dure, poreuse, insoluble dans l'eau, de préférence réticulée, comportant une substance antisudorale particulière solide répartie d'une manière homogène dans la matrice dans ses pores reliés entre eux, en tant que réserve et source de substance antisudorale, par application d'eau sur cette matrice afin d'éliminer par lessivage la substance antisudorale à partir de cette matrice sans modification de la géométrie des pores.

12. Procédé pour fabriquer un produit antisudoral tel que revendiqué dans l'une quelconque des revendications 1 à 6, qui comprend la formation d'un mélange d'une substance antisudorale particulière solide et de matériaux formant une matrice; et la polymérisation et/ou la réticulation des matériaux formant la matrice pour former une matrice polymère sèche, poreuse, réticulée, insoluble dans l'eau, la substance antisudorale étant répartie d'une manière homogène dans la matrice dans ses pores reliés entre eux.

13. Procédé selon la revendication 12, dans lequel le mélange contient également un ou plusieurs additifs, qui sont répartis dans les pores de la matrice avec la substance antisudorale.

14. Procédé selon la revendication 13, dans lequel un additif est présent, qui est capable de se dissoudre dans les matériaux formant la matrice, et dans lequel le mélange est refroidi.

10

15

20

25

30

35

40

45

50

55

Fig.1.

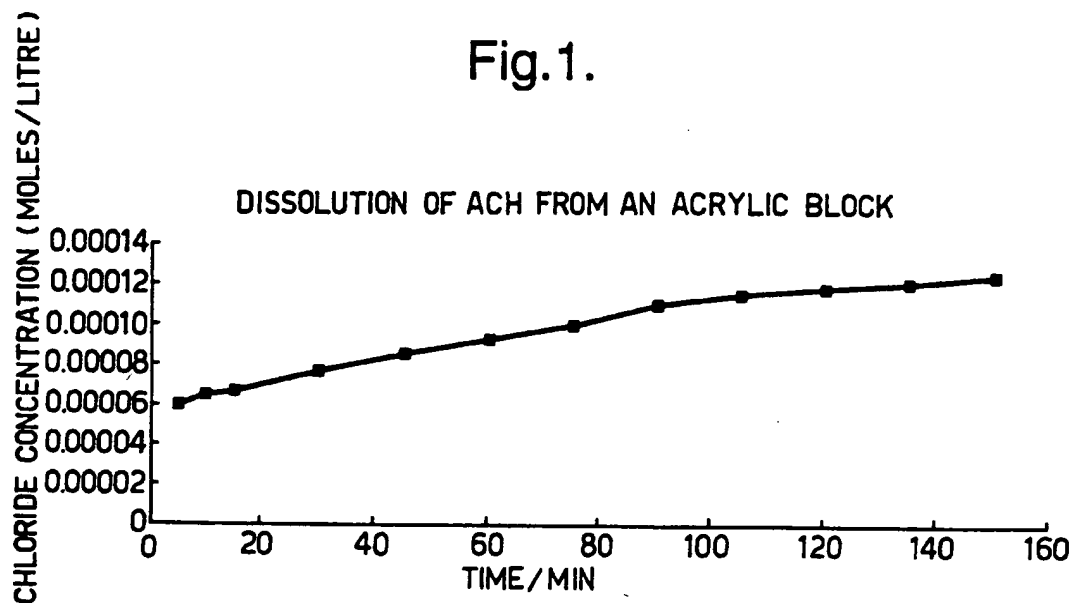


Fig.2.

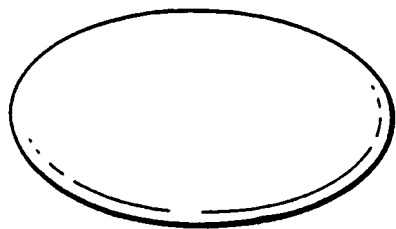


Fig.3.




Fig.4.

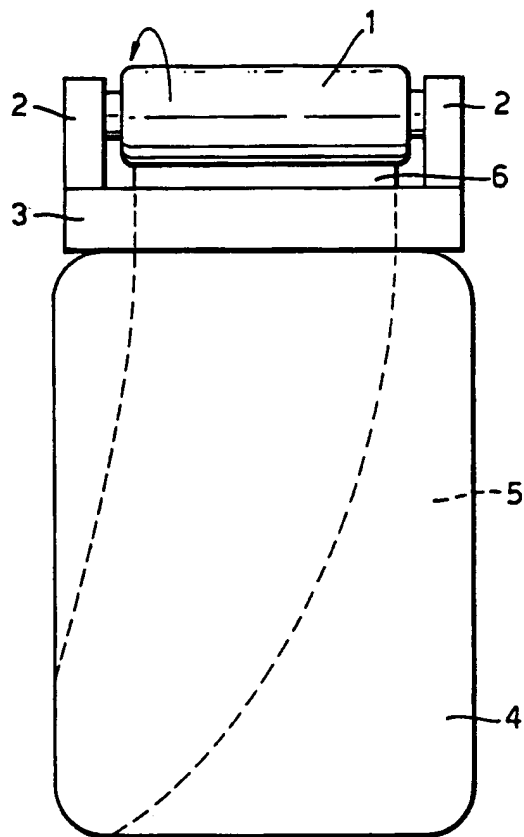


Fig.5.

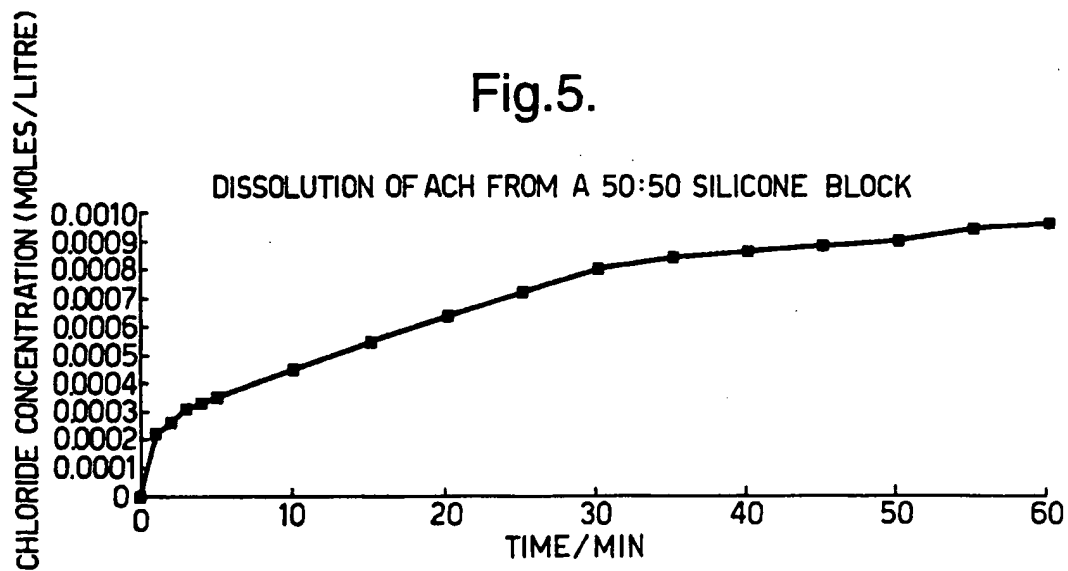


Fig.6.

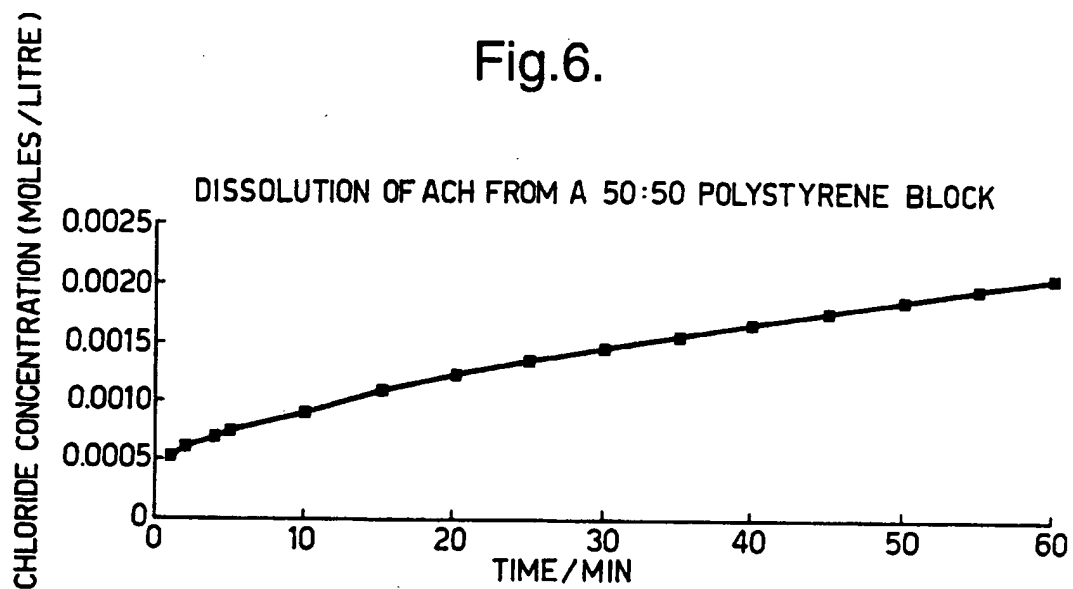


Fig.7.

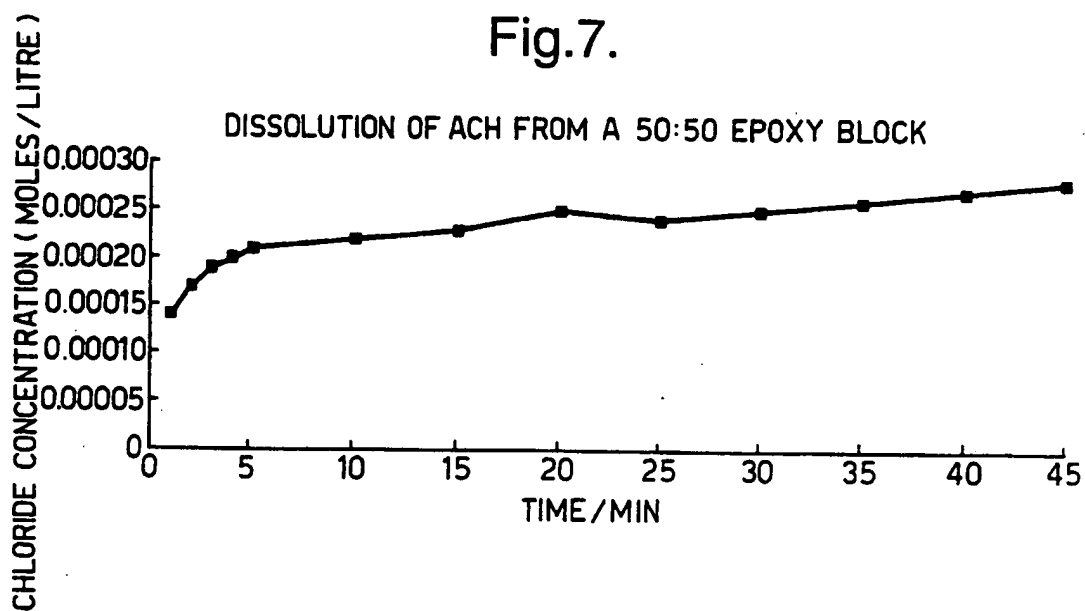


Fig.8.

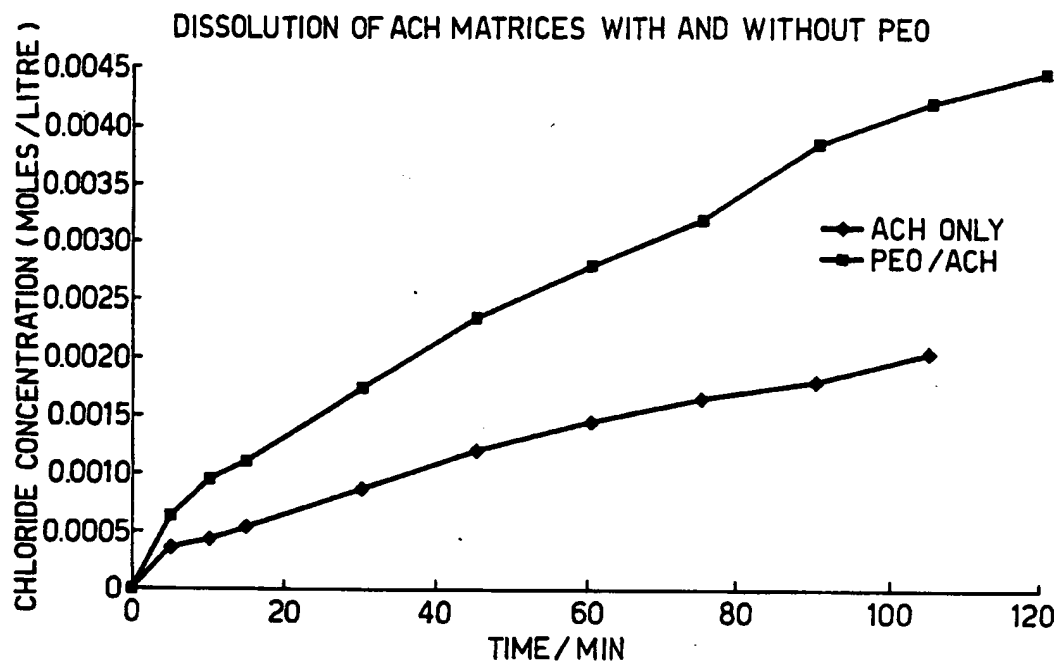


Fig.10.

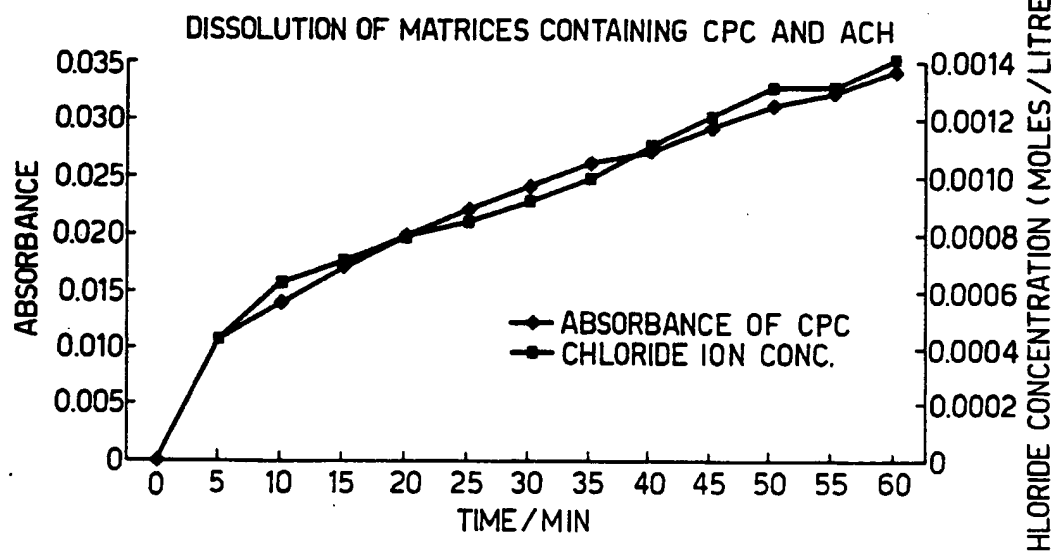


Fig.9.

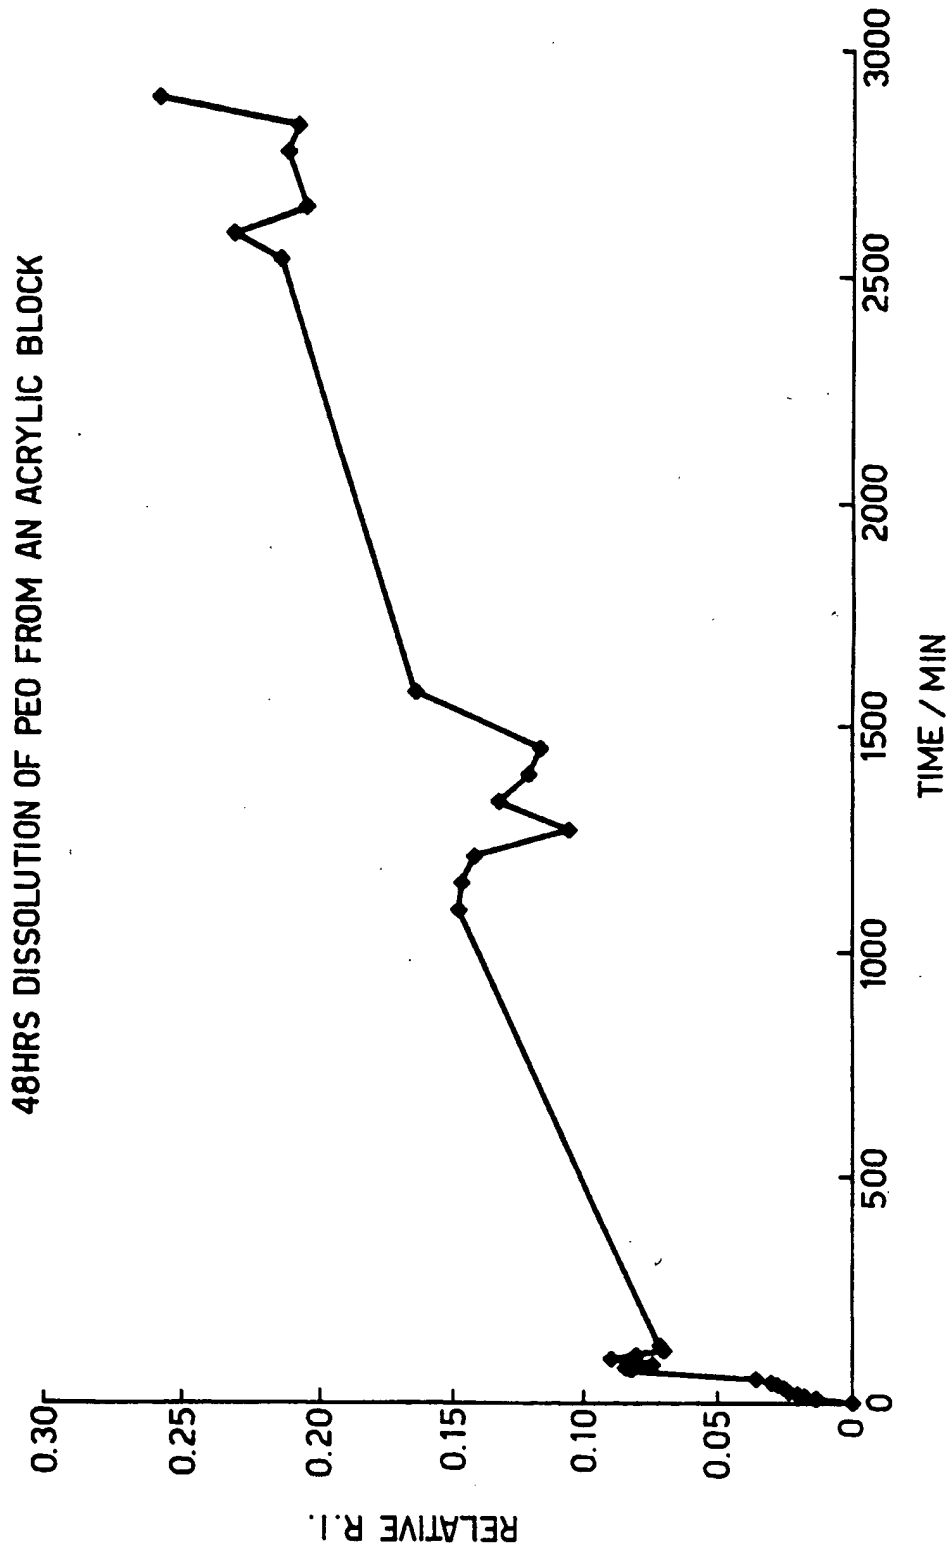


Fig.11.

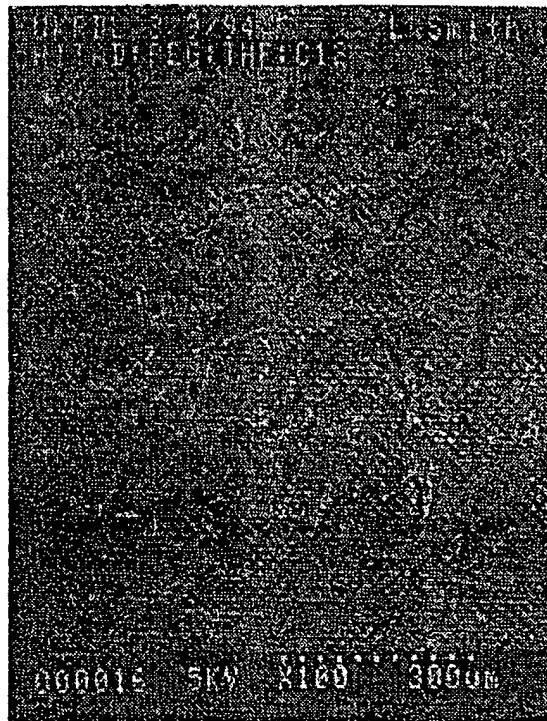


Fig.12.

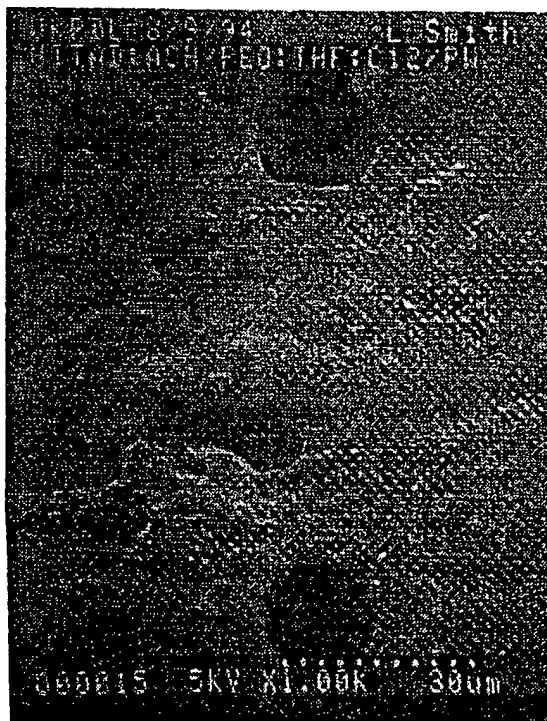


Fig.13.



Fig.14.

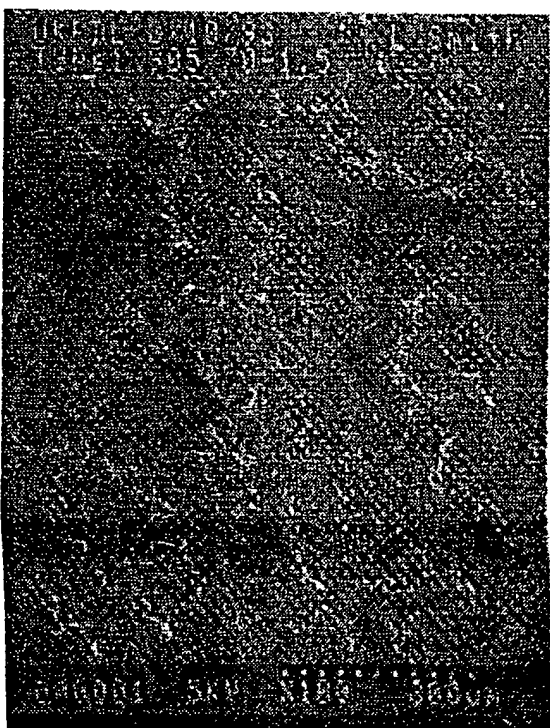


Fig.15.

